

**GLORIA®****6/9/12 kg****PH 6 / PH 9 / P 6 / P 12 PRO**

portable

cartridge operated

powder



GLORIA PH 6 PRO

## GLORIA P / PH PRO - cartridge operated powder fire extinguishers - almost universal application

GLORIA powder PH/P PRO extinguishers with strike-knob operation for various areas of use.

Additionally, suppressible and rotating extinguishing pistol ensure well-directed, regulated

output of extinguishing stream.

Immediate, fast extinguishing due to the effect of cooling and suppression, enriched with an anti-catalytic effect.

**GLORIA PH 6 / PH 9 / P 6 / P 12 PRO – products with consistent strike-knob mechanism for A, B and C fire classes**

Cartridge operated fire extinguishers with an in-house developed, fibre-glass reinforced, high-quality special plastic valve in the distinctive GLORIA design. Extremely robust and multi-purpose applicable for powder and wet fire extinguishers.

GLORIA PH 6 / PH 9 / P 6 / P 12 PRO extinguishers may be used in the following fire classes:

Type	A	B	C	D	MED
PH 6 PRO	43	233	•	—	⚙️
PH 9 PRO	55	233	•	—	⚙️
P 6 PRO	34	233	•	—	⚙️
P 12 PRO	55	233	•	—	⚙️

### Areas of use:

- Outdoor areas
- Chemist's laboratories
- Cars
- Underground parkings and car parks
- Heating systems
- Industries
- Marine industry

Service-friendly - large filler opening, fast and easy exchange of cartridge.

Convenience product with well-proven strike-knob operation and rotating suppressible extinguishing pistol with spray nozzle.


Environmentally friendly, performance-differentiated high-quality ABC extinguishing powder of variable capacity.

Reignition in the case of fires of solids is suppressed.

GLORIA extinguishing powders are hydrophobic and non-toxic.

Serially equipped with quality wall bracket with two rubber grommets, appropriate car brackets are available separately.

With colour-coding of extinguishing agent - gray for powder.

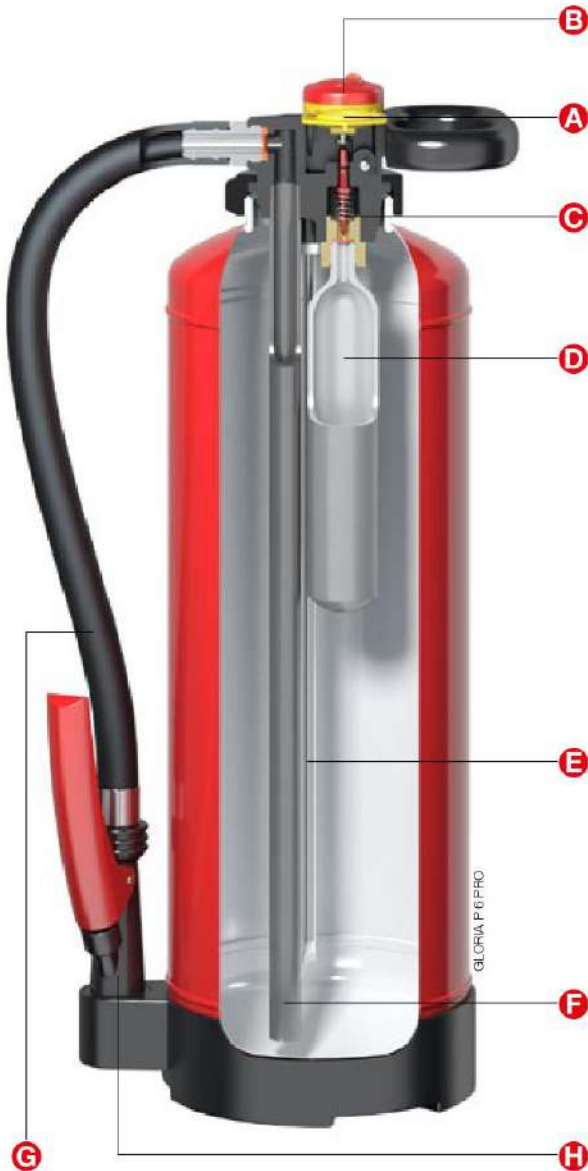

- Pull the **yellow safety pin (A)**.
- By operating the **strike knob (B)**, the **puncture pin (C)** laps the **CO<sub>2</sub> gas cartridge (D)**.
- Abruptly **CO<sub>2</sub>** flows through the **blow pipe (E)** into the container and ensures a good swirling of the powder.
- Through the **driptube (F)** the powder gets into the **hose assembly (G)**.
- The rotating and suppressible **extinguishing pistol (H)** allows for a targeted and largescale fire fighting.



**Product and performance features**

- Fire extinguisher container made from quality steel with two suspension clips, externally covered with polyester resin powder coating (free from heavy metals) for a long life-time.
- High-strength fibre-glass reinforced special plastic valve body, with black-coloured, anodised metal union nut and neck ring M 74.
- Internal CO<sub>2</sub>-gas cartridge with PE-coating and consistent connection thread M 18.
- Three bolts welded on the bottom of the container ensure excellent fitting of the foot-ring against drop-off or twisting.
- Long-lasting hose assembly with fabric lining made from synthetical rubber material.
- Robust, shock-resistant plastic skirt with nozzle adapter allowing for stability and protection against damages and corrosion.
- Legible marking of extinguisher according to standard EN 3-7 with a permanent screen printing technique.
- Approved to use at electrical installations up to 1000 V with minimum distance of 1 m.
- Each fire extinguisher delivered in a separate cardboard box.



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Qty of extinguishing agent [kg]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D Ø [mm]
PH 6 PRO	PG 6 H	801271.1426	≈10,5	ABC-Powder	6	CO <sub>2</sub>	22	6	-30 / +60	510 / 300 / 165, 150
PH 9 PRO	PG 9 H	803341.1426	≈15	ABC-Powder	9	CO <sub>2</sub>	23	6	-30 / +60	565 / 290 / 185, 170
P 6 PRO	PG 6 H	801941.0000	≈10,5	ABC-Powder	6	CO <sub>2</sub>	22	6	-30 / +60	510 / 300 / 165, 150
P 12 PRO	PG 12 H	801291.1426	≈18,6	ABC-Powder	12	CO <sub>2</sub>	32	7	-30 / +60	610 / 290 / 205, 190

GLORIA PH 6 / PH 9 / P 6 / P 12 PRO - technical data

subject to technical changes

