

**GLORIA®****6/9/****SK 6 / SK 9 / SKP 6 EASY**

portable

**cartridge operated****eco foam**

GLORIA SK 6 EASY

## GLORIA EASY line eco foam- robust, multi-purpose and gentle to the environment

GLORIA SK / SKP EASY extinguishers with a very intense effect of the wetting extinguishing agent causes cooling and suppression.

GLORIA SKP 6 EASY: special foam concentrate to extinguish polar liquids (e. g. alcohol fires).

### GLORIA SK 6 / SK 9 / SKP 6 EASY – cartridge operated eco foam extinguishers.

Operation with an in-house developed, fibre-glass reinforced, high-quality special plastic valve in the distinctive GLORIA design, which is resistant to tension, chemicals, moisture as well as corrosion.

GLORIA EASY line eco foam extinguishers may be used in the following fire classes:

Type	A	B	C	MED
SK 6 EASY	21	183	—	⊗
SK 9 EASY	27	233	—	⊗
SKP 6 EASY	13	113	—	—

#### Areas of use:

- Polar liquids fires (SKP 6 EASY)
- Offices and medical practices
- Airports
- Department stores
- Municipal institutions
- Workshops
- Marine industry
- Living areas

Service-friendly - large filler opening, fast and easy exchange of cartridge, foam concentrate in separate, pre-assembled, disposable cartridge (no swimming cartridge) – separated from water.

Environmentally friendly – water without additional fire fighting substances.


Film-forming extinguishing agent definitely without environmentally damaging PFOS

Environmentally friendly by well-directed and regulated output of extinguishing agent.

Serially equipped with quality wall bracket with two rubber grommets, appropriate car brackets are available.

**SK 6 / SK 9 / SKP 6 EASY**

portable

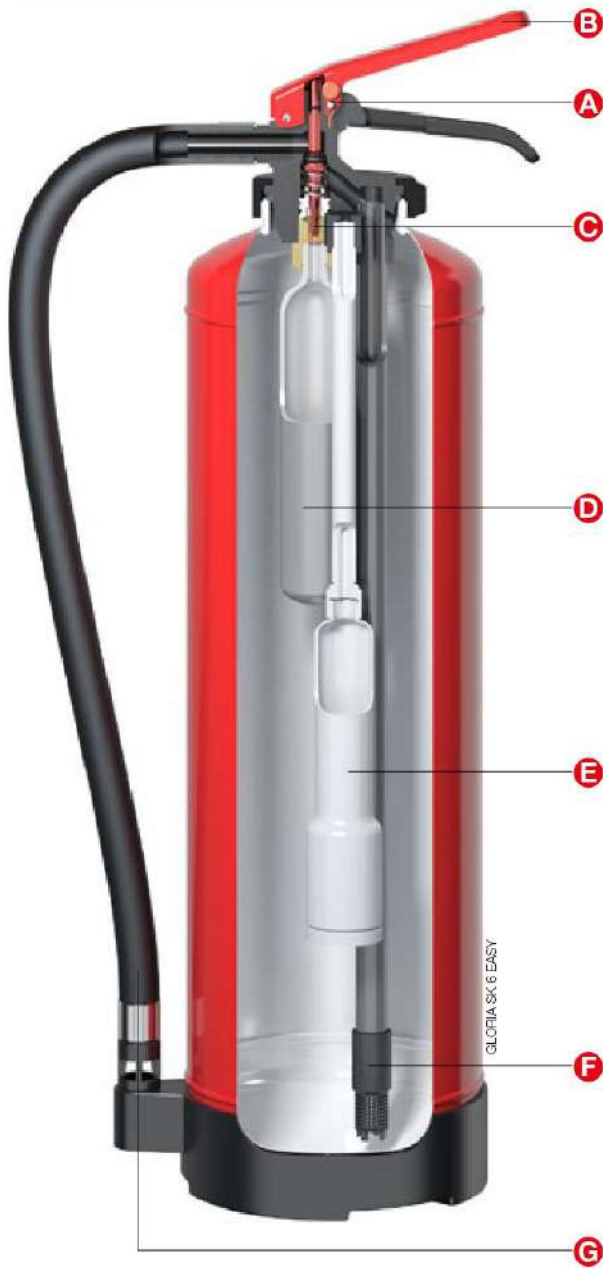

- Pull the **metal safety pin A**.
- By shortly pressing down the **lever B** for the first time, the **puncture pin C** laps the **CO<sub>2</sub> gas cartridge D**.
- At the same time CO<sub>2</sub> flows into the **cartridge E** and presses the foam concentrate into the container. Water and foam agent are being mixed.
- By pressing down the **lever B** again, the foam/water mix gets through the **diptube F** into the **hose assembly G**.
- By releasing the **lever B** the extinguishing stream is being disconnected.
- The cartridges has to be replaced afterwards.



GLORIA SK 6 EASY - valve lock.



GLORIA SK 9 EASY - nozzle view.

**Product and performance features**

- Fire extinguisher container made from quality steel with two suspension clips, externally covered with polyester resin powder coating (free from heavy metals) for a long life-time.
- Wet fire extinguishers with high-quality, long-lasting internal coating against corrosion.
- Consistent, high-strength fibre-glass reinforced special plastic valve body, with black-coloured, anodised metal union nut and neck ring M 74.
- Internal CO<sub>2</sub>-gas cartridge with PE-coating and connection thread M 18.
- Three bolts welded on the bottom of the container ensure excellent fixing of the footing against drop-off or twisting.
- Long-lasting hose assembly with fabric lining made from synthetical rubber material.
- Robust, shock-resistant plastic footing with foam tube adapter allowing for stability and protection against damages and corrosion.
- Each fire extinguisher delivered in a separate cardboard box.
- Approved to use at electrical installations up to 1000 V at min. distance of 1 m.



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Qty of extinguishing agent [l]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D, Ø [mm]
<b>SK 6 EASY</b>	S 6 H	804121.0000	≈10,5	0,12 l foam concentrate, 5,88 l water	6	CO <sub>2</sub>	52	5	+5 / +60	600 / 310 / 165, 150
<b>SK 9 EASY</b>	S 9 H	804131.0000	≈16,2	0,18 l foam concentrate, 8,82 l water	9	CO <sub>2</sub>	85	5	+5 / +60	620 / 290 / 205, 190
<b>SKP 6 EASY</b>	S 6 H	804121.1721	≈10,5	0,27 l foam concentrate, 5,73 l water	6	CO <sub>2</sub>	53	5	+5 / +60	600 / 310 / 165, 150

GLORIA SK 6 / SK 9 / SKP 6 EASY - technical data

subject to technical changes

