

**GLORIA®****6/9 l****WH 6 / WH 9 / W 6 / W 9 / WF 6 / WF 9 EASY**

portable

**cartridge operated****water**

GLORIA WF 6 EASY

## GLORIA EASY line water fire extinguisher with top level results - and environmentally friendly!

GLORIA fire extinguisher type WH 9 EASY with rating 43 A – without additives harmful to the environment.

Especially useful in extinguishing of wood, paper and textile, due to good wetting of hydrophobic materials.

### GLORIA WH / W / WF EASY – squeeze-grip, environmentally friendly water extinguishers

A product range with consistent squeeze-grip mechanism with an in-house developed, fibre-glass reinforced, high-quality special plastic valve in the distinctive GLORIA design.

GLORIA EASY line water extinguishers can be used in the following fire classes:

Type	A	B	C	MED
WH 6 EASY	34	–	–	–
WH 9 EASY	43	–	–	–
W 6 EASY	21	–	–	–
W 9 EASY	27	–	–	☉
WF 6 EASY	21	–	–	–
WF 9 EASY	27	–	–	☉

#### Areas of use:

- Agricultural sector
- File storage
- Offices
- Wood processing
- Paper and Packaging storages
- Textiles
- Firing ranges and banquettes
- Marine industry
- Living areas

Extinguishing agent definitely without environmentally damaging, perfluorinated tensides PFOS or PFOA.

Immediately ready to use after pulling the safety pin.

Water extinguishers with a capacity of 6 and 9 l of water, enriched only with a wetting agent (which reduces the surface tension of water), no other additives (type W).


Available frost-resistant versions (-30 °C) with a capacity of 6 and 9 l (type WF).

With colour coding of extinguishing agent - the blue colour code for water.

Serially equipped with quality wall bracket, appropriate car brackets are available separately.

**WH 6 / WH 9 / W 6 / W 9 / WF 6 / WF 9 EASY**

**portable**

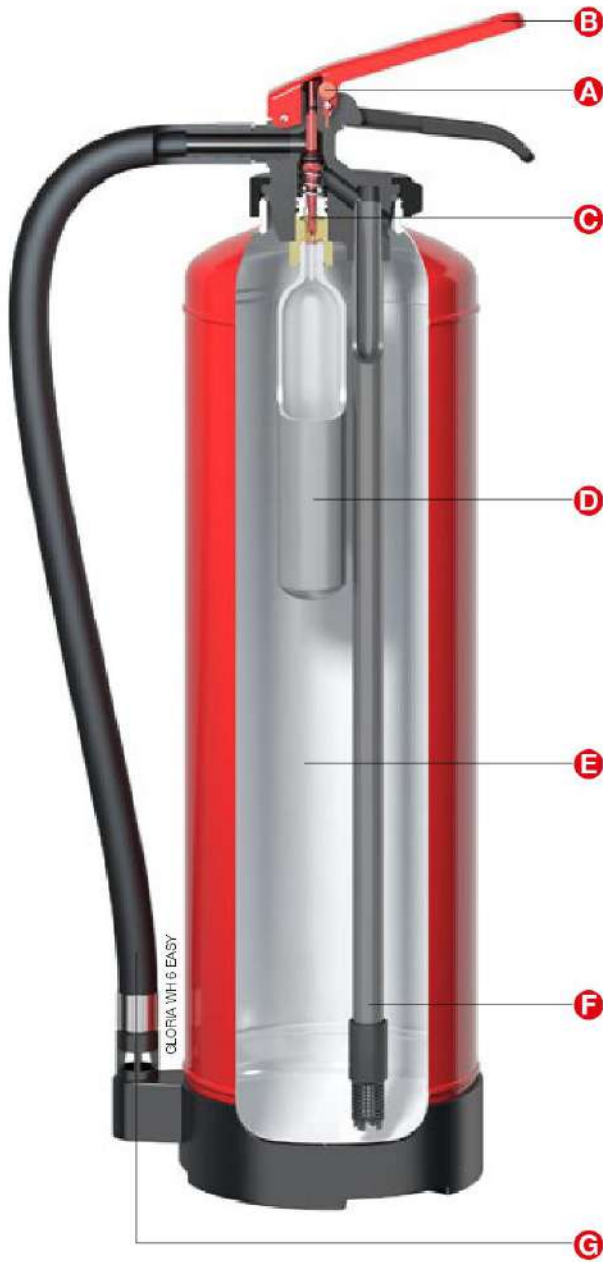

- Pull the **metal safety pin A**.
- By shortly pressing down the **lever B** for the first time, the **puncture pin C** laps the **CO<sub>2</sub> gas cartridge D**.
- At the same time CO<sub>2</sub> abruptly flows into the **container E**.
- By pressing down the **lever B** again, the agent gets through the **driptube F** into the **hose assembly G**.
- By releasing the **lever B** the extinguishing stream is being disconnected.



**Product and performance features**

- Fire extinguisher container with two suspension clips, made from high quality steel, externally coated with hard-wearing polyester resin powder coating, free from heavy metals.
- Wet fire extinguishers with high-quality, long-lasting internal coating against corrosion.
- Consistent, high-strength fibre-glass reinforced special plastic valve body – strong, sturdy, stable, moisture resistant, corrosion free, high temperature resistant, UV resistant.
- Large, maintenance friendly neck ring M 74, with black-coloured, anodised metal union nut.
- Internal CO<sub>2</sub>-gas cartridge with PE-coating and connection thread M 18.
- Shock-resistant plastic footing ensuring stability and protection against damages and corrosion.
- Three bolts welded on the bottom of the container ensure excellent fixing of the footing against drop-off or twisting.
- Long-lasting hose assembly with fabric lining made from synthetic rubber material.
- Approved to use on electrical installations up to 1000 V at minimum distance 1 m.
- Each fire extinguisher delivered in a separate cardboard box.



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Qty of extinguishing agent [l]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D, Ø [mm]
WH 6 EASY	W 6 H	801601.1776	≈11	Water with impregnate	6	CO <sub>2</sub>	47	4	0 / +60	600 / 310 / 165, 150
WH 9 EASY	W 9 H	801611.1776	≈16,2	Water with impregnate	9	CO <sub>2</sub>	62	4	0 / +60	620 / 290 / 205, 190
W 6 EASY	W 6 H	801601.0000	≈10,2	Water with wetting agent	6	CO <sub>2</sub>	47	4	5 / +60	600 / 310 / 165, 150
W 9 EASY	W 9 H	801611.0000	≈16	Water with wetting agent	9	CO <sub>2</sub>	62	4	5 / +60	620 / 290 / 205, 190
WF 6 EASY	W 6 H-30	801621.0000	≈10,6	Water, frost-resistant	6	CO <sub>2</sub>	47	4	-30 / +60	600 / 310 / 165, 150
WF 9 EASY	W 9 H-30	801631.0000	≈14,9	Water, frost-resistant	9	CO <sub>2</sub>	62	4	-30 / +60	620 / 290 / 205, 190

GLORIA WH 6 / WH 9 / W 6 / W 9 / WF 6 and WF 9 EASY - technical data

*\*Subject to technical changes*

UTC CCS MANUFACTURING POLSKA SP. Z O.O.  
KOLEJOWA 24, 39-100 ROPCZYCE  
POLAND

PHONE +48 17 22 10 206  
FAX +48 17 22 10 241  
pfx@fs.utc.com



**United Technologies**

Climate | Controls | Security