

GLORIA®**6/9l****SDE 6 / SDE 9**

portable

stored pressure

eco foam



GLORIA SDE series - the stored pressure squeeze-grip version with eco foam

Easy activation with a lever- both for carrying and extinguishing.

Ergonomic design allows instant usage upon pulling safety pin.

High quality product, gentle to the environment. Extinguishing agent biodegradable in more than 99%, without the environmentally harmful PFOS.

GLORIA SDE 6 / SDE 9 – gentle to the environment extinguisher with practical hand lever fitting.

GLORIA foam fire extinguishers SDE 6 / SDE 9 can be used in the following fire classes:

Type	A	B	C	MED
SDE 6	21	144	—	☉
SDE 9	27	183	—	☉

Areas of use:

- Offices and practice rooms
- Schools
- Hospitals
- Airports
- Industries with flammable liquids
- Municipal facilities
- Department stores, storage areas
- Administrative and manufacturing areas
- Workshops
- Shipping companies
- Living areas
- Restaurants
- Hotels

Foam extinguishers are practical in petrochemistry as well as in public spaces. Contrary to powder, they do not cause a „dust cloud“ effect which may impede breathing and sight. An indisputable advantage is the easiness to clean afterwards.

Comes with quality wall bracket with two rubber grommets. Car holder and footring available on request.


Film forming fire extinguishing agent guarantees no environmentally damaging PFOS.

Device ready for use at any time!

Three bolts welded to the bottom of the container ensure excellent fitting of the footring against falling or twisting.

GLORIA SDE 6

Product and performance features

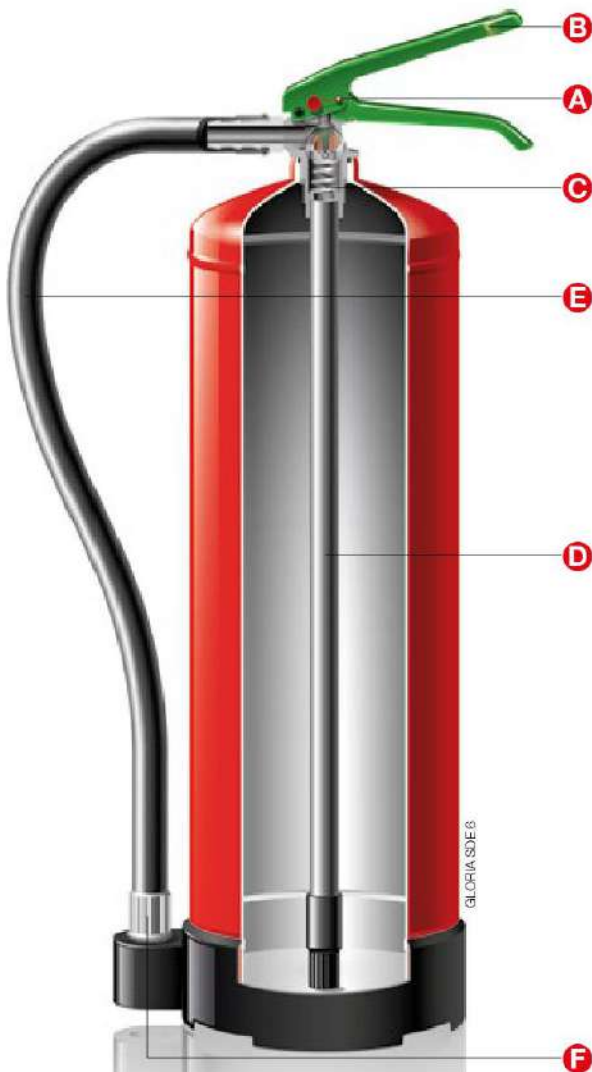

- Pull the **metal safety pin A**.
- Pressing the **lever B** opens the **valve C**.
- Extinguishing agent enters the **diptube D** from where it goes to the **hose E** then to the **nozzle F** and spray.



GLORIA SDE 6 - valve lock



GLORIA SDE family

- Fire extinguisher container made from high quality steel, covered outside with weather-resistant, environmentally friendly (heavy-metal-free), 100% polyester resin coating.
- Cylinder with internal lining prevents from corrosion and assures long life time of extinguisher.
- Extinguisher with standard M 30 thread and pressure valve.
- Foam extinguisher with a 5 point spray nozzle allows to direct stream straight to the desired spot.
- Robust, impact resistant plastic footing with hose nozzle holder ensures stability and protection of the device against damage and corrosion.
- Durable hose with fabric insert made of synthetic rubber material.
- Legible marking of extinguisher according to standard EN 3-7 with a permanent screen printing technique.
- Suitable for electrical installations up to 1000 V at minimum distance 1 m.
- Each fire extinguisher delivered in a separate cardboard box.



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Q-ty of extinguishing agent [l]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D, Ø [mm]
SDE 6	S-6-L	803681.1790	≈10,8	AB Foam, film-forming	6	nitrogen	34	4	+5 / +60	557 / 162 / 275, 150
SDE 9	S-9-L	801741.1790	≈14,8	AB Foam, film-forming	9	nitrogen	55	4	+5 / +60	522 / 202 / 300, 190

GLORIA SDE 6 / SDE 9 - technical data
subject to technical changes

