

**GLORIA®****6 kg****F 6 GX AL / F 6 GX / F 6 G DESIGN**

portable

**cartridge operated****powder**

GLORIA F 6 GX DESIGN

## **GLORIA F 6 GX AL - automatic recharging - in seconds!** **GLORIA F 6 GX / F 6 G - semi-automatic with strike button!**

GLORIA powder F 6 GX AL / F 6 GX / F 6 G extinguishers with nearly universal application.

Additionally, suppressible and rotating extinguishing pistol ensure well-directed, regulated

output of extinguishing stream.

Immediate, fast extinguishing due to the effect of cooling and suppression, enriched with an anti-catalytic effect.

### **The Royal League - DESIGN line powder fire extinguishers – with automatic or semi-automatic charging, environmentally friendly**

Unmatched comfort of operating, the highest quality of components together with extinguishing results in a top-class device.

GLORIA F 6 GX AL / F 6 GX / F 6 G DESIGN extinguishers may be used in the following fire classes:

Type	A	B	C	D	MED
F 6 GX AL DESIGN	55	233	•	—	⊗
F 6 GX DESIGN	55	233	•	—	—
F 6 G DESIGN	43	233	•	—	—

#### **Areas of use:**

- Outdoor areas
- Chemist's laboratories
- Cars
- Underground parking and car parks
- Heating systems
- Industries
- Marine industry

The "AL" variant: immediate readiness to extinguish - pulling the safety pin will automatically puncture the CO<sub>2</sub> cylinder and charge the fire extinguisher.

With a footing and valve body of a high impact strength.


Environmentally friendly, performance-differentiated high-quality ABC extinguishing powder of variable capacity.

Reignition in the case of fires of solids is suppressed.

GLORIA extinguishing powders

are hydrophobic and non-toxic.

With colour-coding of extinguishing agent - gray for powder.

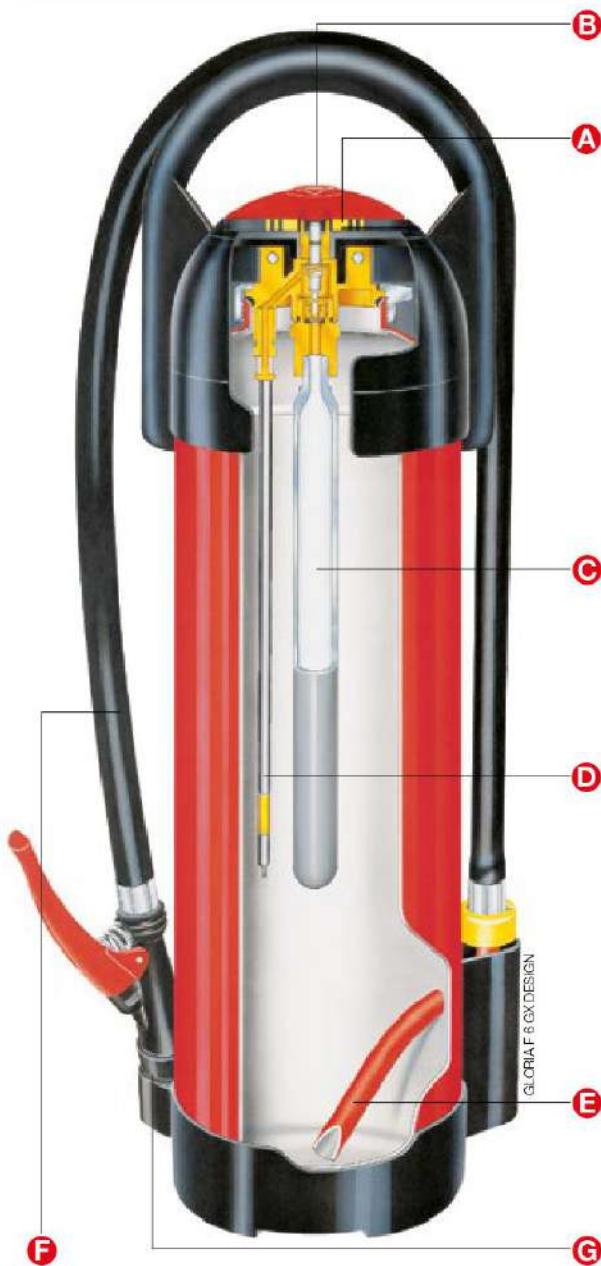

- Pull the **yellow safety pin A**.
- Using the **strike button B**, causes piercing of the **CO<sub>2</sub> gas cartridge C**.
- CO<sub>2</sub> immediately enters the extinguisher container through a **blowpipe D** increasing the pressure in the extinguisher.
- Through the integrated **driptube E** the extinguishing agent gets into the **hose assembly F**.
- The rotating and suppressible **extinguishing pistol G** allows for a targeted fire fighting.



**Product and performance features**

- Fire extinguisher container made from quality steel, externally coated with polyester resin powder coating (free from heavy metals) for a long life-time.
- Durable, extremely long hose assembly with fabric lining made from synthetic rubber material. Resistant to bending thanks to integration with carrying handle, connection made of stainless steel.
- Robust, shock-resistant plastic footing with foam tube adapter allowing for stability and protection against damages and corrosion. Recessed area for marking the device on the footing.
- Green indicator informs of the readiness of a device. Extinguisher is ready after pulling the yellow safety clip, green indicator is removing automatically (AL version) or after additional pushing a large strike button with a coloured pictogram (non-AL version). Red information plate appears with „Please service” advise.
- Assembly and disassembly holes protected against tampering, the yellow safety clip cannot be pushed back into the extinguisher.
- Each fire extinguisher delivered in a separate cardboard box.
- Approved to use on electrical installations up to 1000 V / minimum distance 1m.
- Possibility of certification of other devices for compliance with the MED directive.



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Qty of extinguishing agent [kg]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D, Ø [mm]
F 6 GX AL DESIGN	PG 6 H	000421.1930	≈11	ABC-Powder	6	CO <sub>2</sub>	20	5	-30 / +60	570 / 220 / 165, 150
F 6 GX DESIGN	PG 6 H	000421.1909	≈11	ABC-Powder	6	CO <sub>2</sub>	20	5	-30 / +60	570 / 220 / 165, 150
F 6 G DESIGN	PG 6 H	000421.0000	≈11	ABC-Powder	6	CO <sub>2</sub>	20	5	-30 / +60	570 / 220 / 165, 150

GLORIA F 6 GX AL / F 6 GX / F 6 G DESIGN - technical data  
subject to technical changes

