

GLORIA®**2l****FBDP 2**Fat Fire Extinguishers **portable****stored pressure****wet chemical****GLORIA FBDP 2 – handy, squeeze-grip operated fire extinguisher, ideal for household applications**

Compact-sized but extremely robust and powerful, especially against fat fires.

GLORIA FBDP 2 fat fire extinguishers with extinguishing agent Favorit Home can be used in the following fire classes:

Type	A	B	F	MED
FBDP 2	8	55	40	—

Areas of use:

- Bakeries
- Restaurants
- Kitchens
- Diners
- Canteens and cafeterias
- Private households
- Marine industry

With pressure gauge for easy visual control.

Additional safety valve - prevent the pressure from increasing over the limit.

Service friendly Schrader valve.

Easy activation with a lever, handle used for carrying.

Controllable, low rate discharge to prevent oil splash-back.

Immediately ready to use after pulling out the safety pin.

Extinguishing agent guaranteed without polluting PFOS (perfluorooctanesulfonate).

High performance on fat fires, Fire classes A/B/F!



GLORIA FBDP 2

GLORIA FBDP 2 - designed to fight fires resulting from cooking oils and fats


Extinguishing agent contains a specially formulated wet chemical which, when applied knocks out flames in seconds, changes burning cooking oil into soap form preventing the re-ignition.

Convenient size and extinguishing efficiency adjusted to use in every household.

GLORIA FBDP 2 model is designed to be frost resistant up to -30 °C.

FBDP 2

Fat Fire Extinguishers **portable**

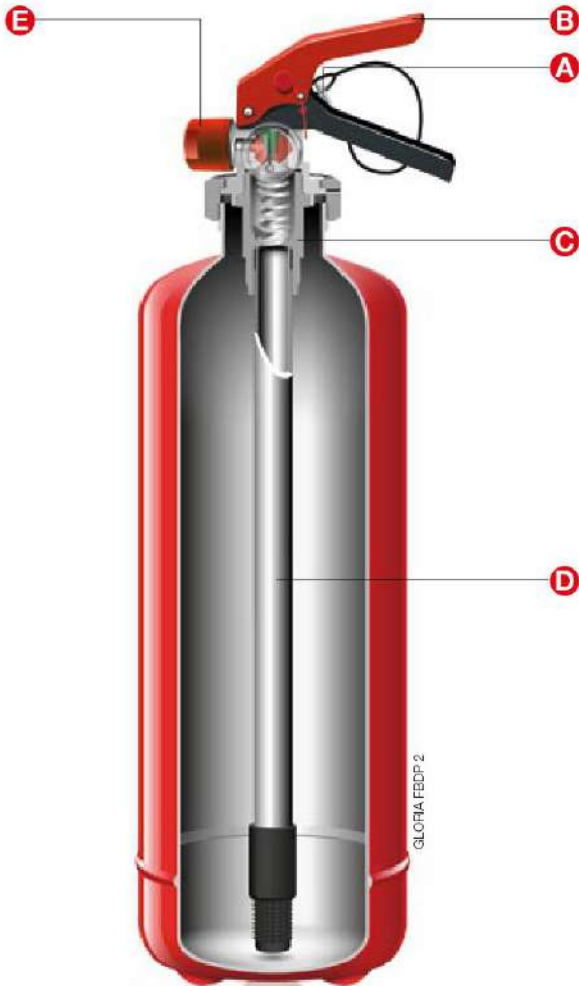

- Pull out the **metal safety pin A**.
- Pressing the **lever B** opens the **valve C**.
- Extinguishing agent enters the **dip tube D** from where it goes to the **nozzle E** and spray.



Product and performance features

- Fire extinguisher container made from high quality steel, externally covered with hard-wearing polyester resin powder coating, free from heavy metals.
- Cylinder inside coated with high quality GLORIA synthetic sealing with long life time.
- High strength brass, chrome plated valve body – strong, sturdy, stable, of high chemical resistance. Moisture resistant, corrosion free, high temperature resistant, UV resistant.
- 3-hole nozzle for accurate spreading of the extinguishing agent.
- Made of longdraw lined cylinder.
- Approved to use on electrical installations up to 1000 V at minimum distance 1 m.
- Informative and scratch-resistant labelling with quality silkscreening.
- Quality wall bracket included.
- Each extinguisher delivered in individual carton box.



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Qty of extinguishing agent [l]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D, Ø [mm]
FBDP 2	FBDP 2	001531.0000	≈4,2	Favorit Home	2	nitrogen	≈12	≈2	-30 / +60	375 / 131 / 113, 113

GLORIA FBDP 2 - technical data

**Subject to technical changes*

