

**GLORIA®****1/2 kg****P 1 / P 2**

Home, Car &amp; Boat

**portable****stored pressure****powder****GLORIA P 1 / P 2 – handy powder general purpose extinguishers.**

GLORIA P series combines the convenience of use and compact design whenever the speed and simplicity of operation is required. Rely on one of the world's leading manufacturers of portable fire extinguishers.

GLORIA car fire extinguishers P 1 / P 2 can be used in the following fire classes:

Type	A	B	C	MED
P 1 G/DB	8	34	•	—
P 2 G	13	89	•	⊙
P 2 GM	13	89	•	⊙

**Areas of use:**

- Cars
- Trucks
- Campers
- Caravans
- Motor boats and yachts
- Workshops
- Households
- Shipping companies

Ergonomic and intuitive fire extinguishers design, necessary when speed and easiness of operation are key features (especially in stress situations).

Smallest external dimensions thanks to special valve and container construction.

Equipped with car holder and security strap - in standard.

P 2 GM / P 2 G are ideal for ADR transport (meet the requirement of law acc. transport of dangerous goods).

High extinguishing power and long duration of extinguishing blast, at any time.

**GLORIA P 1 / P 2 - designed for one handed operation, simultaneously to carry and trigger**

Large handle allows secure handling operation (bearing, aiming and triggering by one hand) in every situation. Rounded edges as specified by the automotive industry.

Sturdy handle with clearly marked operating elements:

- 1 - Securing key (yellow),
- 2 - Extinguishing key (red).


GLORIA P 2 GM

**GLORIA®****1/2 kg****stored pressure****P 1 / P 2**

Home, Car &amp; Boat

**portable****Product and performance features**

- Fire extinguisher container made from high quality steel, covered outside with weather-resistant, 100% polyester resin coating.
- Coating without polluting substances such as Cadmium, TGIC, etc.
- High strength brass valve body – solid, sturdy, stable.
- Valve case made of special durable plastic.
- Approved to use on electrical installations up to 1000 V at minimum distance 1 m.
- Labelling with up-to-date quality silkscreening.
- Servicable and refillable after use, for many times.
- Standby checked at any time by integrated pressure gauge (Type P 2 GM) and check valve.
- Leaflet with assembly instructions and fire performance included.
- Each extinguisher delivered in individual carton box.

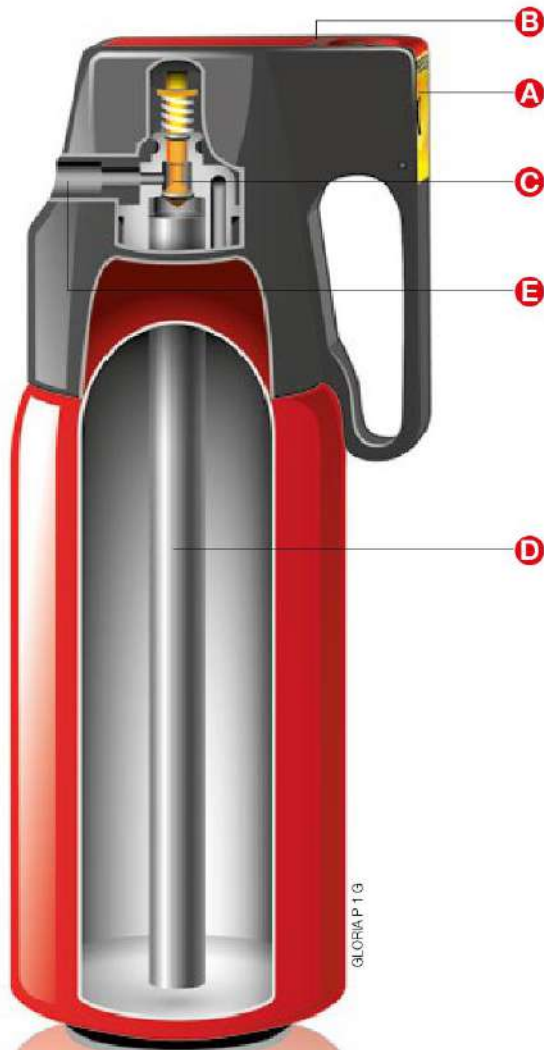

- Push the **yellow button A** - extinguisher is ready to use.
- Push the **red button B** the **valve C** opens.
- Extinguishing agent enters the **dip tube D** from where it goes to the **nozzle E**.



GLORIA P 2 GM



GLORIA P 1 with car bracket



GLORIA P 1 and P 2 family



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Qty of extinguishing agent [kg]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D, Ø [mm]
P 1 DB	PG 1 L	001443.2046	≈1,8	ABC Powder	1	nitrogen	8	4	-30 / +60	270 / 95 / 109, 90
P 2 G	PG 2 L	001463.0000	≈3,7	ABC Powder	2	nitrogen	10	4	-30 / +60	322 / 111 / 145, 110
P 2 GM	PG 2 L	001473.0000	≈3,7	ABC Powder	2	nitrogen	10	4	-30 / +60	322 / 111 / 145, 110

GLORIA P 1 G / P 2 G / P 2 GM - technical data

\*Subject to technical changes

UTC CCS MANUFACTURING POLSKA SP. Z O.O.  
KOLEJOWA 24, 39-100 ROPCZYCE  
POLAND

PHONE +48 17 22 10 206  
FAX +48 17 22 10 241  
pfx@fs.utc.com



**United  
Technologies**

Climate | Controls | Security